

Industrial single-phase 5-step transformer speed controllers for voltage controllable motors, with high benefits and applicable for small engines and all kinds of domestic or industrial facilities. Each series incorporate non controlled 230V output, glass fuse protection.

Specifications

Supply voltage:	230Vac / 50Hz
Max intensity:	1.5A –20A according model
Control type:	5-step switch
Switch ON/OFF:	Integrated in switch (360°)
Indicator lamp:	ON (green)
Regulation:	Start on min. or max.
Output:	230Vac not controlled (L1) 5-step controlled (0-80-120-150-170-230V)
Protection:	Fuse 2A (control) - 2.5A - 12A (type HF)
Connection:	Terminal Block
Enclosure:	Plastic RAL 7035, or metal, IP54




Advantages

Special for ventilation systems
High quality and low price. Easy installation.
The switch can be turned 360° so you can start at high or low speed.

CE Norms

These controllers comply with following mentioned European norms:
EMC 89/336/CEE modified by 92/31/CEE and low voltage norm 72/23/CEE
RoHS compliant

Wiring diagram

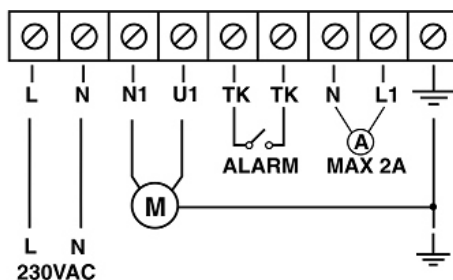

MODEL WITH TK	CODE	MODEL WITHOUT TK	CODE	INTENSITY	SURFACE MOUNTING IP54 DIMENSIONS (mm)
ATFC+TC 230V 1,5A	125031	ATFC 230V 1,5A	125021	1,5A	122 x 187 x 90
ATFC+TC 230V 2,2A	125032	ATFC 230V 2,2A	125022	2,2A	122 x 187 x 90
ATFC+TC 230V 3,5A	125033	ATFC 230V 3,5A	125023	3,5A	191 x 240 x 108
ATFC+TC 230V 5,0A	125034	ATFC 230V 5,0A	125024	5,0A	191 x 240 x 108
ATFC+TC 230V 7,5A	125035	ATFC 230V 7,5A	125025	7,5A	188 x 278 x 180
ATFC+TC 230V 10,0A	125036	ATFC 230V 10,0A	125026	10,0A	250 x 300 x 150
ATFC+TC 230V 13,0A	125037	ATFC 230V 13,0A	125027	13,0A	250 x 300 x 150
ATFC+TC 230V 16,0A	125038	ATFC 230V 16,0A	125028	16,0A	
ATFC+TC 230V 20,0A	125039	ATFC 230V 20,0A	125029	20,0A	