

Industrial single-phase 5-step transformer speed controllers for voltage controllable motors, with high benefits and applicable for small engines and all kinds of domestic or industrial facilities. Each series incorporate non controlled 230V output, glass fuse protection.

## Specifications

Supply voltage:	3x230Vac / 50Hz
Max intensity:	1.5A –20A according model
Control type:	5-step switch
Switch ON/OFF:	Integrated in switch
Indicator lamp:	ON (green)
Regulation:	Min. to max.
Output:	230Vac not controlled (L1) 5-step controlled (0-80-120-150-170-230V)
Protection:	Fuse 2A (control)
Connection:	Terminal Block
Enclosure:	Steel RAL 7035, IP54


## Advantages

Special for ventilation systems  
High quality and low price.  
Easy installation.

## CE Norms

These controllers comply with following mentioned European norms:  
EMC 89/336/CEE modified by 92/31/CEE and low voltage norm 72/23/CEE  
RoHS compliant

## Wiring diagram

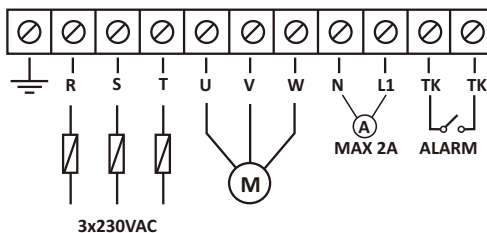

MODEL WITH TK	CODE	MODEL WITHOUT TK	CODE	INTENSITY	SURFACE MOUNTING IP54 DIMENSIONS (mm)
ATFC+TC 3x230V 1,5A	125071	ATFC 3x230V 1,5A	125061	1,5A	300 x 300 x 150
ATFC+TC 3x230V 2,2A	125072	ATFC 3x230V 2,2A	125062	2,2A	300 x 300 x 150
ATFC+TC 3x230V 3,5A	125073	ATFC 3x230V 3,5A	125063	3,5A	300 x 400 x 200
ATFC+TC 3x230V 5,0A	125074	ATFC 3x230V 5,0A	125064	5,0A	300 x 400 x 200
ATFC+TC 3x230V 7,5A	125075	ATFC 3x230V 7,5A	125065	8,0A	300 x 400 x 200
ATFC+TC 3x230V 10,0A	125076	ATFC 3x230V 10,0A	125066	10,0A	400 x 400 x 200
ATFC+TC 3x230V 13,0A	125077	ATFC 3x230V 13,0A	125067	13,0A	400 x 400 x 200
ATFC+TC 3x230V 16,0A	125078	ATFC 3x230V 16,0A	125068	16,0A	400 x 600 x 300
ATFC+TC 3x230V 20,0A	125079	ATFC 3x230V 20,0A	125069	20,0A	400 x 600 x 300